
DEDICATED TO REVOLUTIONIZING THE POWER CHAIR EXPERIENCE









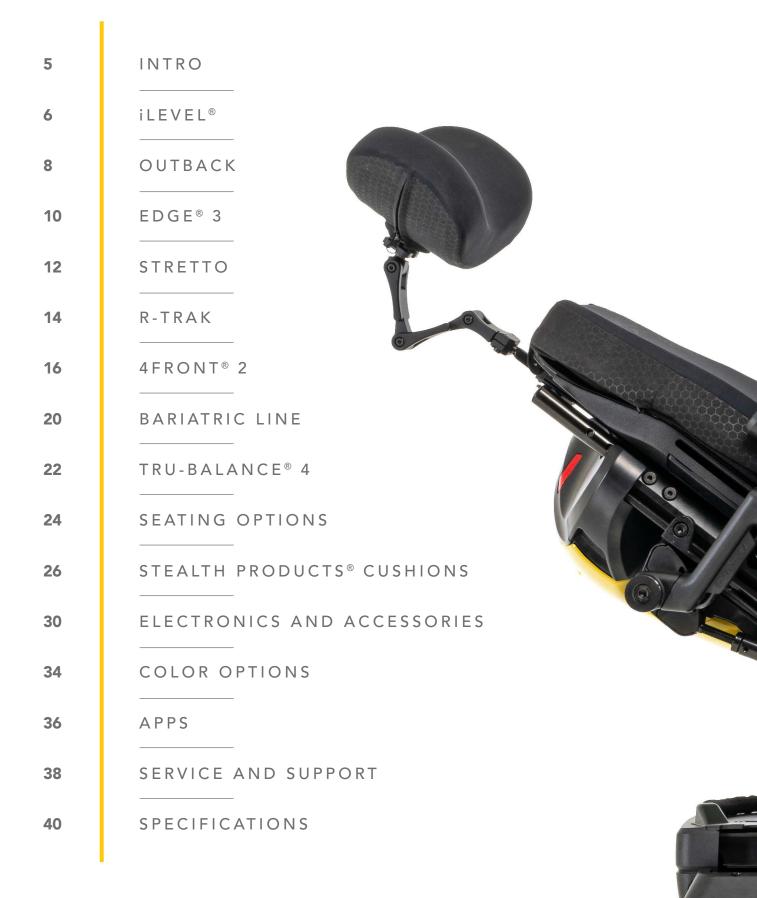



WELCOME TO QUANTUM®

Quantum Rehab[®] was born out of the desire to delight customers with the most advanced, consumer-inspired complex rehab power wheelchairs and related technologies possible.

Clinically-focused and consumer-inspired, Quantum[®] products are engineered and manufactured to meet the widest range of complex rehab needs with functional, durable, stylized, high-performance designs to increase daily functionality and quality of life. At Quantum, consumer needs and wishes are the driving force. We're dedicated to not just meeting medical and clinical needs, but also quality-of-life needs. From the most advanced power seating for pressure management to USB ports, Bluetooth[®] and fender lights, no consumer need is overlooked.

> Headquartered in Duryea, Pennsylvania, Quantum also has operations in Australia, Canada, China, Italy, France, Germany, the Netherlands, New Zealand, and the United Kingdom.





Quantum[®] Power Chairs are FDA Class II Medical Devices designed to aid individuals with mobility impairments.





"COOKING IS SO MUCH EASIER NOW THAT I CAN REACH THINGS. I CAN'T IMAGINE MY LIFE WITHOUT ILEVEL."

> **STEPHANIE WOODWARD** ROCHESTER, NY

FDA Class II Medical Device

FDA Class II Medical Device

FDA Class II Medical Device

FDA Class II Medical Device


Social interaction at iLevel®

FEATURES

- 12" of power adjustable seat height while at walking speed;
- maximum of 10" height on the Q6 Edge® HD
- iLevel's patented Extra Stability Technology® enhances safety for transfers, reach, and numerous other

activities of daily living

• Available on the Stretto, Edge® 3 and Q6 Edge® 2.0



come standard with iLevel®



iLEVEL[®]

POWER SEAT ELEVATION

Standing Height + Speed + Stability = Authentic iLevel (like no other)

iLevel® power seat elevation technology features a revolutionary new power chair design for a better experience. iLevel improves daily functionality and quality of life by allowing operation of the power chair with the seat elevated while at walking speed.



"THE OUTBACK LETS ME LIVE LIFE THE WAY I WANT. WHETHER I'M WORKING ON THE FARM OR GOING FOR A HIKE WITH MY FRIENDS, THE OUTBACK ALLOWS ME TO GO WHEREVER I WANT TO GO."

ABLE WITH

BRYAN ANDERSON NASHVILLE, TN

OUTBACK

4X4 ALL-TERRAIN

Quantum Rehab[®] welcomes adventurers and nature enthusiasts to unleash their wild side with the release of our cutting-edge 4x4 all-terrain power chair, the Quantum[®] Outback! Designed for those who dare to defy conventional limits, this rugged mobility solution promises to elevate any outdoor adventure, whether navigating wooded trails or exploring uncharted terrain.

SPECS


MAXIMUM SPEED: Up to 5 mph (6 mph with optional upgrade)

WEIGHT CAPACITY: 300 lbs. (350 lbs. with Q-Captain Seating)

TURNING RADIUS: 49.2"

POWER SEAT ELEVATION: Optional 10" safe seat elevation

COLORS

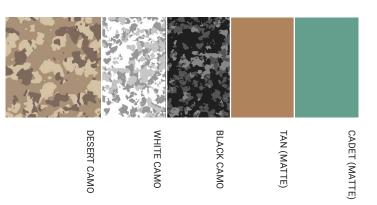







OPTIONAL

TRU-Balance[®] 4 Power Positioning Systems provide a choice of 10, 20, or 30 degrees of power anterior tilt.

OPTIONAL

12" iLevel® power seat elevation at 4.5 mph (standard on TRU-Balance® 4)

> Featuring Extra Stability Technology[®] for safer transfers, reach and other activities of daily living

Q-Logic 3 Advanced Drive Controls with Bluetooth[®]

Stealth Products® cushion featuring exclusive Coolcore® technology

Upgraded SRS (Smooth Ride Suspension)

The Edge® 3 is an FDA Class II Medical Device designed to aid individuals with mobility impairments.



"THE EDGE 3 WITH ILEVEL HAS RESTORED MY INDEPENDENCE AT BOTH WORK AND HOME. ILEVEL HAS ALLOWED ME TO GET MORE INVOLVED AND START A DIALOGUE WITH PEOPLE, SOMETHING I WOULDN'T HAVE DONE BEFORE."

> MERLISHA HENDERSON PHOENIX, AZ



EDGE[®] 3

MID-WHEEL DRIVE

The Edge® 3 offers upgraded SRS (Smooth Ride Suspension), which provides a smooth, comfortable ride and advanced stability. Optional iLevel® is available at 4.5 mph with up to 12" of power adjustable seat height.

SPECS

MAXIMUM SPEED: 6.25 mph (7 mph with optional 4-pole motors and Q-Logic 3 / 4.5 mph when elevated with iLevel®)

WEIGHT CAPACITY: 300 lbs. (See Q6 Edge® HD for increased capacity)

TURNING RADIUS: 20.5"

POWER SEAT ELEVATION: Optional 12" iLevel

COLORS		* See we	bsite for a (complete l	ist of color	options.
GREEN MACHINE	RED (DEEP	LEMO	RASP	EVOL	BLUE JEAN
N MA	RED CORVETTE	DEEP PURPLE	LEMON CRUSH	RASPBERRY BERET	UTIO	JEAN
CHIN	ETTE	PLE	NSH	RY BE	N OR	2
m				RET	EVOLUTION ORANGE	

Drive wheel color accents (standard)



NARROWEST POWER BASE IN AMERICA AT 20.47" WIDTH WITH 12.5"

DRIVE WHEELS



OPTIONAL TRU-Balance[®] 4 Power

Positioning Systems provide a choice of 10, 20, or 30 degrees of power anterior tilt.

OPTIONAL

12" iLevel® power seat elevation at 3.5 mph (standard on TRU-Balance® 4)

> Toolless removal of rear shroud with battery access door

12

Independent SRS (Smooth Ride Suspension) Q-Logic 3 Advanced Drive Controls with Bluetooth[®] and USB charger

Stealth Products® cushion featuring exclusive Coolcore® technology

Front and rear LED fender lights

The Stretto is an FDA Class II Medical Device designed to aid individuals with mobility impairments.



"TIGHT ROOMS, NARROW DOORWAYS, OUT-OF-REACH CABINETS AND VAN RAMPS ... NOW I CAN GO WHERE I WANT TO GO, ALL **BECAUSE OF THE STRETTO!"**

ABLEWITH

BRYSON FOSTER CONCORD, NC

STRETTO

MID-WHEEL DRIVE

The Edge 3 Stretto® is the narrowest, most maneuverable power base in America! In addition to its narrow width, it is equipped with independent SRS (Smooth Ride Suspension), making it ideal for children, teenagers and small adults. The Stretto is available with 12.5" or 14" drive wheels and optional 12" of iLevel® power adjustable seat height.

SPECS

MAXIMUM SPEED: 6.25 mph (3.5 mph when elevated with iLevel®)

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 21"

POWER SEAT ELEVATION: Optional 12" iLevel

COLC) R S		* See web	osite for a c	complete li	st of color	options.
		and and					
					12000		
	BLUE JEAN	RED CORVETTE	DEEP PURPLE	LEMON CRUSH	RASPBERRY BERET	EVOLUTION ORANGE	GREEN MACHINE





THE EVOLUTION OF **REAR WHEEL DRIVE**



R-TRAK

REAR-WHEEL DRIVE

The R-TRAK revolutionizes the real-wheel drive power chair experience with independent SRS suspension on all four wheels, providing a smoother, more maneuverable ride. Standard features include fender lights, USB charger and drive wheel color accents. The R-TRAK is also available with our 10" safe seat elevation, allowing the client to drive up to 3.5 mph while elevated.


SPECS

MAXIMUM SPEED: Up to 7 mph (3.5 mph when elevated)

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 25.7"

POWER SEAT ELEVATION: Optional 10" safe seat elevation

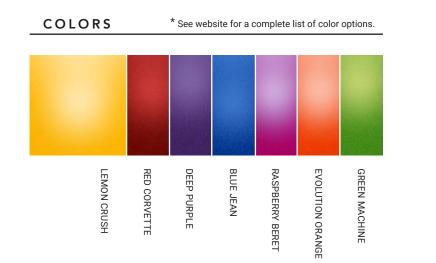



R-TRAK As a global innovator, we are creating

a product that offers confidence and stability elevated at the speed of life. Our state of-the-art facility has a robust team of experienced technicians who custom build each R-TRAK specifically to the individual consumer's needs.



Scan to learn about the design and development of the R-TRAK.

Optional Quantum backup camera can be mounted anywhere

SEAT ELENP

BLE WITH

SAFF









available on the 4FRONT[®] 2 HD

Optional backup camera with 3.5" display can be mounted in multiple locations

OPTIONAL

TRU-Balance[®] 4 Power Positioning Systems provide a choice of 10°, 20°, or 30° of power anterior tilt.

OPTIONAL

10" power adjustable safe seat elevation at 3.5 mph (standard on TB4)

Redesigned caster arms for improved durability

> STC (Smart Traction Control)

Q-Logic 3e controller featuring a magnetic charging port (Q-Logic 3 also available)

Stealth Products® cushion featuring exclusive Coolcore® technology

Front and rear LED fender lights for seeing and being seen (standard)

The 4Front® 2 is an FDA Class II Medical Device designed to aid individuals with mobility impairments.

Automotive-grade SRS (Smooth Ride Suspension)



11

"RIDING IN THE 4FRONT 2 IS UNLIKE ANY CHAIR I HAVE EVER USED. THE 4FRONT 2 PUSHES THE LIMIT SET BY ITS PREDECESSOR BEYOND MY EXPECTATIONS."

ABLE WITH

SPARE SEAT ELEN

CHRISTIAN BUDNEY SCRANTON, PA

$4FRONT^{\circ}2$

FRONT-WHEEL DRIVE

Featuring STC (Smart Traction Control)

The 4Front[®] 2 is the next generation of the 4Front[®] Power Chair! New Smart Traction Control (STC), along with Smooth Ride Suspension (SRS), provide stability for smooth obstacle transitions and unmatched driving performance. Additional new features include 4-pole motors and redesigned caster arms for improved durability and aesthetics and reduced weight.

SPECS

COLORS		* See website for a complete list of color options.				
EVOLUTION ORANGE	RED CORVETTE	DEEP PURPLE	LEMON CRUSH	RASPBERRY BERET	GREEN MACHINE	BLUE JEAN







Q6 EDGE[®] 2.0

MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 6.25 mph (3.5 mph when elevated)

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 20.5"

POWER SEAT ELEVATION: Optional 12" iLevel®

COLORS

* See website for a complete list.

FDA Class II Medical Device



FDA Class II Medical Device



Q6 EDGE[®] HD

BARIATRIC MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 4.7 mph (3.5 mph when elevated)

WEIGHT CAPACITY: 450 lbs. (400 lbs. with iLevel®)

TURNING RADIUS: 19.75"

POWER SEAT ELEVATION: Optional HD 10" iLevel®

COLORS

* See website for a complete list.





AVAILABLE WITH 10" SAFE SEAT ELEVATION AND Q4 POWER TILT

J4E

MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 5 mph

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 20.5"

POWER SEAT ELEVATION: Optional 10" Safe Seat Elevation

COLORS



J4E

shown with optional 10"

Safe Seat Elevation



AVAILABLE WITH 10" SAFE SEAT ELEVATION AND Q4 POWER TILT

J4

MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 5 mph

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 21"

POWER SEAT ELEVATION: Optional 10" Safe Seat Elevation

COLORS





FEATURING Q4 HEAVY DUTY POWER TILT

J4 HD

MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 5 mph

WEIGHT CAPACITY: 400 lbs.

TURNING RADIUS: 21"

COLORS





Q1450

BARIATRIC FRONT-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 4.5 mph

WEIGHT CAPACITY: 600 lbs.

TURNING RADIUS: 26.5"

COLORS





J6

MID-WHEEL DRIVE

SPECS

MAXIMUM SPEED: 4 mph

WEIGHT CAPACITY: 300 lbs.

TURNING RADIUS: 22"

COLORS



#1 FOR REHAB POWER BUILT TOUGH

Quantum[®] bariatric power chairs all offer an innovative design with superior outdoor performance and superb indoor maneuverability. Our baratric line of power chairs offers speeds as high as 5 mph and weight capacities up to 600 lbs.

All of our bariatric power chairs can be equipped with power positioning for greater comfort, such as TRU-Balance® HD Power Tilt. This seating system can assist with pressure relief. To provide additional support, Stealth® cushions and backs are available to provide lumbar support or coccyx and sacral relief. All Quantum bariatric power chairs are available with Q-Logic environmental controls featuring Bluetooth® technology.

QUANTUM® BARIATRICS

Quantum[®] Power Chairs are FDA Class II Medical Devices designed to aid individuals with mobility impairments.

FDA Class II

Q6 Edge® HD **450 LBS.** WEIGHT CAPACITY



	Q6 Edge® HD	Q1450	J4 HD	4Front [®] 2 HD
Capacity	450 lbs.	600 lbs.	400 lbs.	450 lbs.
Top Speed	4.7 mph	4.5 mph	5 mph	5 mph
Turning Radius	19.75"	26.5"	21"	24.5"
Power Elevation	Yes (10")	N/A	N/A	Yes (10")

** Please consult the back of the catalog for detailed specificiations.







FDA Class II Medical Device

TRU-Balance[®] 4 Power Positioning Systems

WITH ANTERIOR TILT AND MEMORY SEATING

Maximum weight capacity of up to 300 lbs.

Up to 8 customizable memory seating positions recall the saved positions of all actuators, offering the choice between sequential or synced movement for each seat function.

Memory seating profiles can be labeled for easy recall of most used positions.

Seat elevation combined with anterior tilt provides optimal access.

Consumers may find it easier to perform ADLs such as: accessing sinks and cooktop surfaces, meal preparation and reaching items in cabinets. TRU-Balance[®] 4 with Dual Actuator AFP shown on the Edge 3 Stretto[®]

Chest Bar



DUAL ACTUATOR POWER ARTICULATING FOOT PLATFORM

Lowers to assist with transfers


Articulation range of 0-7.25"

Knee Blocks

TRU-Balance[®] 4 with 12" iLevel[®] Power Elevation

Elevation range of 85-165 degrees

Only available on TRU-Balance® 4

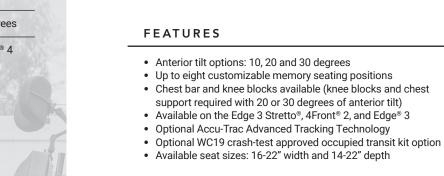

POWER RECLINE

- 85° 165° of recline
- 300 lbs. weight capacity
- Available with power tilt and power adjustable seat lift

TRU-BALANCE[®] 4

POWER POSITIONING SYSTEMS


- No increase in seat-to-floor height
- · Standard shear reduction and cantilever armrests

POWER POSTERIOR TILT

- 0° 50° of tilt
- Lower seat-to-floor height
- Unmatched adjustment and durability
- Maintains center of gravity shift

DRIVE SPEEDS IN ANTERIOR TILT

- Up to 10° of anterior tilt, up to full lift: 2 MPH
- 10-20° of anterior tilt, up to 6" of lift: **0.5 MPH**
- 10-20° of anterior tilt, over 6" of lift: DRIVE LOCKOUT
- Over 20° of anterior tilt: DRIVE LOCKOUT

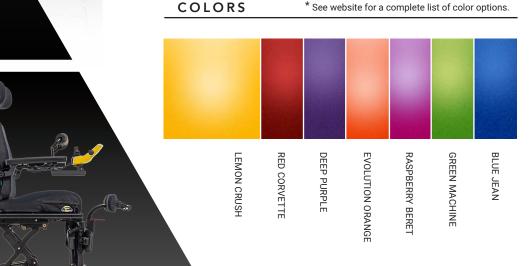



"I'M ABLE TO ELEVATE TO EVERYONE'S HEIGHT WITH iLEVEL. I FEEL MORE INCLUDED."

> MORGAN STEWARD COVINGTON, GA

SEATING

AND POSITIONING



TRU-BALANCE® FLEX SEATING

No-charge static seat for the Edge 3 Stretto®, Edge® 3, Q6 Edge® 2.0, J4 and Rival®

Easily adjustable, versatile design that can grow with the user

Same ease of width and depth adjustment as TRU-Balance® 3

Seat sizes 15"-22" wide and 15"-20" deep



CONTOURED SEATING

Black vinyl captain's seat with optional armrests

Compatible with TRU-Balance 3 power articulating foot platform

Available in high back, medium back, solid seat pan, limited recline, and depth-adjustable



PEDIATRIC SEATING

Easily adjustable, this versatile design can grow with the user

Several width/depth adjustment packages start at 10"

Accepts a wide variety of after-market seats and backs

Available in numerous shroud colors that kids will love

Morgan Steward shown on his Stretto with TRU-Balance® 3 power positioning.

FDA Class II Medical Device

Pediatric Seating



AND STREET



FDA Class II Medical Device



Convenient built-in side/front pouches

Constructed with FRG Sunmate flame-retardant material





	TRU-Comfort 2 SPP	Essence SPP	Solution [®] SPP	Spectrum [®] Foam/Gel SPP
DESCRIPTION ¹	SKIN PROTECTION NO POSITIONING	SKIN PROTECTION AND POSITIONING	SKIN PROTECTION SKIN PROTECTION Standard viscoelastic	SunMate FRG foam top
	Deep contour, CoolCore® cushion cover has "pockets" on sides	Tru-Ċomfort 2, lateral and pre-ischial shelf Contoured, HD molded foam base, coccyx and sacral relief	foam top with twin cell aqueous viscous gel (heavier gel) insert in ischial well, mid-level contour	(SunMate FRG XXSoft (blue); Medsoft (green)) with multi- layered foam insert or twin cell ultra-lightweight viscous gel insert in ischial well, sacral relief
WEIGHT CAPACITY	14-15" W: 175 lbs. 16-21" W: 350 lbs. 22+" W: 450 lbs.	10-15" W: 175 lbs. 16-21" W: 350 lbs. 22" W: 450 lbs.	10-15" W: 175 lbs. 16-20" W: 350 lbs. 22+" W: 500 lbs.	14" W: 175 lbs. Foam & Gel 16-20" W: 350 lbs. Foam & Gel 22+" W: 650 lbs. Foam; 550 lbs. Gel
OVERALL WEIGHT	4 lbs.	3.5 - 5 lbs.	5.4 lbs.	Foam: 3 lbs. Gel: 3.5 lbs.
HEIGHT	4.5″	3.5″	3″	3″
DIMENSIONS ²	14x14" up to 24x24" Odd sizes in 15-21" W SOF available	10x10" up to 22x24" Odd sizes in 15-21" W SOF available	10x10" up to 24x24" Odd sizes in 15-19" W SOF available	Foam: 14x18" up to 32x28" Gel: 14x18" up to 24x26" Odd sizes in 17" and 19" W SOF available
MSRP	\$420 - \$525	\$420 - \$625	\$394 - \$452	\$483 - \$557 (\$620 for Spectrum Foam SPP larger than 24")
HCPCS	E2607/E2608	E2607/E2608	E2607/E2608	E2607/E2608
ALLOWANCES ³	\$332.23 / \$398.98	\$332.23 / \$398.98	\$332.23 / \$398.98	\$332.23 / \$398.98

 CoolCore[®] is standard on all cushions except the Simplicity G.
 Special order sizes available for all cushions except the Glacial SP and Simplicity G. Contact sales for additional assistance.
 Allowances listed are estimations for cushions billed in conjunction with Group 3 power chair bases using the KU modifier and may vary by state.



Stealth® ADI Q-Back 2.0

FEATURES

- 450-lb. weight capacity
- CoolCore[®] Cover with 1.25" of Medium Soft Sunmate[®] FRG foam
- Two styles: AL Style (Aluminum) and AFT Style (Aluminum Flat Top)
- Available configurations: Active Contour (2.5" depth), Deep Contour (4" depth), and Extra Deep Contour (6" depth)
- Widths: 14"-22"
- Shell heights: Standard (16"), Tall (18"), Extra Tall (20"), Extra Extra Tall (22")


Premiere P	Glacial SP	Zen SP	Simplicity G
POSITIONING Gray X-Soft SunMate FRG foam topper, high density	New SIM G base, fluid resistant overlay, top	ROTECTION New SIM G base, SunMate FRG XXSoft	GENERAL USE High-density foam
positioning wedges built in for offloading.	and sides TPU heat-sealed, low profile, lightweight cooling gel topper	(blue topper), low profile, lightweight	Stealth-Tek cover standard More contour to sacral/coccyx relief well
14-15" W: 175 lbs. 16-21" W: 350 lbs. 22" W: 500 lbs.	10-15" W: 175 lbs. 16-21" W: 350 lbs. 22+" W: 400 lbs.	10-15" W: 175 lbs. 16-21" W: 350 lbs. 22+": 400 lbs.	10-15" W: 175 lbs. 16-21" W: 350 lbs. 22+" W: 400 lbs.
3.5 lbs.	3.5 lbs.	2.5 lbs.	2 lbs.
3.5″	2.5″	3″	2″
14x13" up to 22x22"	10x10" up to 24x24"	10x10" up to 24x24"	10x10" up to 24x24"
Odd sizes up to 21" W	Odd sizes in 15-21" W	Odd sizes in 15-21" W	Odd sizes in 15-21" W
SOF available	No SOF	SOF available	No SOF
\$341 - \$499	\$347 - \$462	\$331 - \$446	\$116 - \$173
E2605/E2606	E2603/E2604	E2603/E2604	E2601/E2602
\$308.53 / \$481.33	\$173.74 / \$215.97	\$173.74 / \$215.97	\$70.10 / \$136.85

DME providers are responsible for determining appropriate billing codes when submitting for insurance reimbursement. HCPCS codes provided should not be considered as legal advice and do not guarantee reimbursement. Payer coding, coverage, and bundling guidelines may apply.









o-logic 3 ex
JOYSTICK CONTROLLER

Q-Logic 3 iAccess Programmable Switchbox available with push bottons or toggles

Q-Logic 3 Stand Alone Joystick 100

\$

0

11:25am

Indoor Moderate

10

0.0 ^{kuu}

TRIP 032.2

"MY EDGE 3 GIVES ME THE OPPORTUNITY TO USE ADVANCED TECHNOLOGY THAT GIVES ME SO MUCH INDEPENDENCE."

ZOE HERNANDEZ

Bluetooth[®]

Q-LOGIC 3

ADVANCED DRIVE CONTROLS

The Q-Logic 3 Advanced Drive Controls System from Quantum Rehab® is like no other power wheelchair electronics system. Designed from clinician and consumer feedback, Q-Logic 3 is user-friendly and highly customizable.

FEATURES

- Wireless Bluetooth® programming through Windows devices
- · Bluetooth access to computer, tablet, and phone functions
- iAccess programmable push button and toggle options for customized seating access
- Clinic Mode:
 - · Quickly set up multiple input devices in client evaluations
 - · Automatically assigned drive modes to input devices





Q-Logic 3 home screen Q-Logic 3 drive screen

ENHANCED DISPLAY

The optional Q-Logic 3 EX Enhanced Display serves as a separate screen used with specialty drive controls to display system data. With the Enhanced Display's built-in environmental controls, Q-Logic 3 can operate a wide range of appliances that use infrared (IR) remote controls, such as televisions, and serves as a Bluetooth® computer mouse emulator.



charging port for clients with limited dexterity

The Q-Logic 3e features a magnetic



Q-LOGIC 3e JOYSTICK CONTROLLER

Q-Logic 3 Specialty Controls Interface Module

NON-EXPANDABLE

JOYSTICK OPTIONS

SIP-N-PUFF



EXPANDABLE (Q-LOGIC 3)



Q-Logic 3 EX Joystick



Q-Logic 3e

Joystick

(<u>e</u> (<u>e</u>) (<u>e</u>

Q-Logic 3 EX Enhanced Display



Q-Logic 3 Stand Alone Joystick



Q-Logic 3 iAccess Programmable Switchbox available with push buttons or toggles



Q-Logic 3 Specialty Interface Module

PROPORTIONAL DRIVE CONTROLS



Mo-Vis™ All-Round Joystick



Stealth[®] Precision Mini Proportional Joystick



Mo-Vis™ All-Round Light Joystick



Stealth® Mushroom Joystick



Mo-Vis™ Multi Joystick



Mo-Vis™ Micro Joystick



Mo-Vis™ Foot Control



Stealth® i-Drive® Control Harness

MULTI-SWITCH



Stealth[®] i-Drive[®] 4 Stealth Pro, 3-Switch Head Array



Stealth[®] i-Drive[®] Tri-Array, 3-Switch Head Array



Stealth[®] i-Drive[®] Curved Array

TRAY ARRAYS

SINGLE SWITCH



Stealth® Egg Switch





Mo-Vis™ Twister Satellite Button



Stealth® i-Drive® Eclipse Tray with Four Capacitive Proximity Sensors



Stealth[®] i-Drive[®] Eclipse Tray with Four Fiber Optic Proximity Sensors

MISC. ACCESSORIES



Front and Rear LED Fender Lights



Personal Item Hook



Hydration System



Phone Holder



Transfer Bars (Pair)



Personal Items Pouch



Backup Camera





BLUE JEAN (MATTE) PPW-BLU-11 Available on Stretto, Edge® 3, 4Front® 2, 4Front® 2 HD and R-TRAK



LEMON CRUSH PPW-YEL-04 Available on Stretto, Edge® 3/2.0/2.0X, 4Front[®] 2, 4Front[®] 2 HD and R-TRAK



DEEP PURPLE PPW-PRP-05 Available on, Edge® 3/2.0/2.0X/Z/HD, Stretto, 4Front[®] 2, 4Front[®] 2 HD and R-TRAK



GREY STREET PPW-SIL-03 Available on Edge® 3/2.0/2.0X/Z/HD, Stretto, 4Front® 2, 4Front® 2 HD and R-TRAK

34





QUANTUM® OUTBACK COLOR OPTIONS

BLACK CAMO DGN2301319-WCM9-PCL2

WHITE CAMO DGN2301319-WCM10-PCL2

DESERT CAMO DGN2301319-WCM11-P





PPW-GRN-11 Available on Edge® 3/2.0/2.0X/Z/HD, Stretto, 4Front® 2, 4Front® 2 HD and R-TRAK

RED CORVETTE

PPW-RED-01





ELECTRIC BLUE PPW-BLUE-09 Available on all Quantum® bases

Available on all Quantum® bases

COLOR OPTIONS



MIDNIGHT BLUE PPW-BLU-10 Available on Edge® 3/2.0/2.0X/Z/HD, Stretto, 4Front[®] 2, 4Front[®] 2 HD and R-TRAK



RASPBERRY BERET PPW-PNK-04 Available on Stretto, Edge® 3, 4Front® 2, 4Front[®] 2 HD and R-TRAK



NIGHT TRAIN (MATTE) PPW-BLK-03 Available on Edge® 3/2.0/2.0X/Z/HD, Stretto, 4Front[®] 2, 4Front[®] 2 HD and R-TRAK



HYDROGRAPHICS Available on Stretto, Edge® 3, 4Front® 2 and 4Front® 2 HD







PPW-PNK-03 Available on all Quantum® bases except for J4 and J4 HD

PPW-ORN-07

except for J4 and J4 HD

PRETTY IN PINK





PPW-GRN-08 Available on Stretto, Edge® 3/2.0/2.0X, 4Front[®] 2, 4Front[®] 2 HD and R-TRAK




HYDROGRAPHICS Available on Stretto, Edge® 3, 4Front® 2 and 4Front® 2 HD





TAN DGN2301319-TTN1-PCL2

CL2

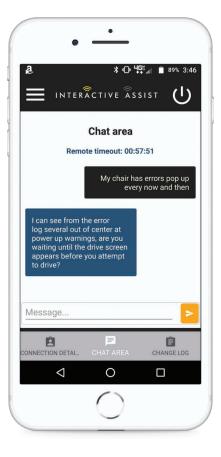

INTERACTIVE ASSIST

Reduce service visits with this innovative app.

- SCREEN MIRRORING
- REAL-TIME MONITORING
- EFFICIENCY IMPROVEMENTS
- TROUBLESHOOTING
- BATTERY MANAGEMENT
- DIAGNOSTIC HISTORY
- BASIC PROGRAMMING
- REMOTE ACCESS

- CHANGE LOG HISTORY
- SAVING XPA FILES
- MOTOR USAGE HISTORY
- TEXT CHATTING
- PROGRAMMING IR MENU
- ACCESS TO BLUETOOTH FEATURES
- DEALER-TO-DEALER PROGRAMMING ACCESS

Q-Logic 3 now features Interactive Assist. Interactive Assist from Quantum Rehab[®] is an app which provides a direct real-time connection from a power chair's electronics to a provider's programming station. The connection provides the technician with full system and diagnostics information along with tools, such as a real-time mirror image of the power chair's electronics display, to eliminate wasteful trips.



Download Interactive Assist today!


ECON-I

Convenience at your fingertips!

The Econ-I app is now available for download on Apple[®] iPhone[®] devices, allowing you to program Quantum[®] Power Chairs conveniently from your iPhone or iPad. Compatible devices include the iPhone 6S/6s Plus/SE or higher, and the iPad Air/iPad Mini 2/iPad Pro/iPad 5th generation or higher. All devices must support iOs version 12 or higher.



Download ECON-I today!






SOLUTIONS AT YOUR FINGERTIPS

PQ-365

All Quantum® and Pride® product information combined into one app!

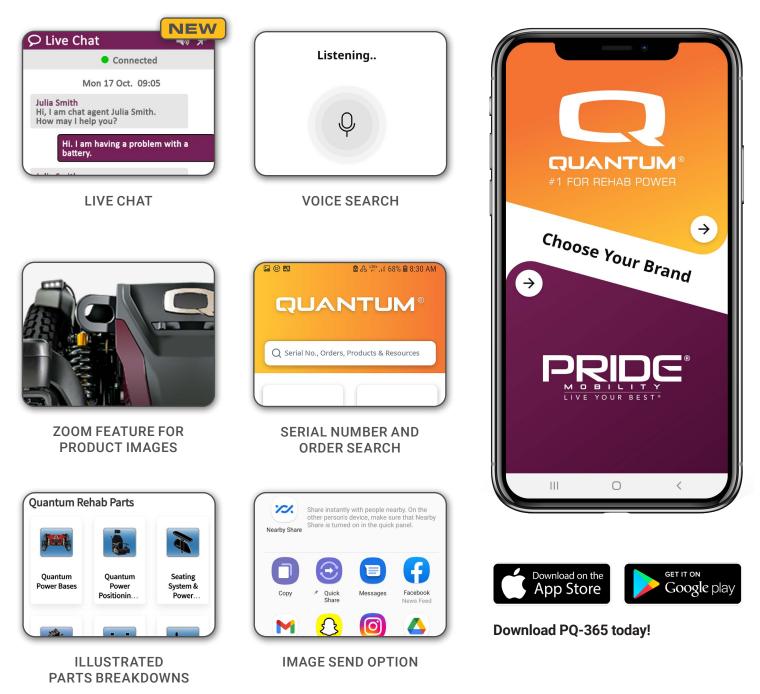

SALES SUPPORT 866.800.2002

Quantum Sales Support assists with design, ordering, pricing and quality assurance.

CUSTOM GROUP 877.465.2999

The Quantum Custom Group provides innovative custom solutions and specialized product modifications.

TECHNICAL SUPPORT EXT. 5200


Quantum Technical Support offers assistance with troubleshooting and parts order placement.

PRODUCT PLANNING & REIMBURSEMENT

Assistance with understanding Medicare codes and coverage criteria, product planning, provision guidelines, claims coding, prescreens and assistance in regard to high-end rehab clients.

SET TO SPEC SERVICE

Set to Spec Service from Quantum Rehab[®] is designed to assist you in delivering Q6 Series Power Chairs to your clients. We will pre-set, to your specifications, seat-to-floor heights, seating center of gravity, armrest heights, front riggings, thoracic and/or thigh laterals.

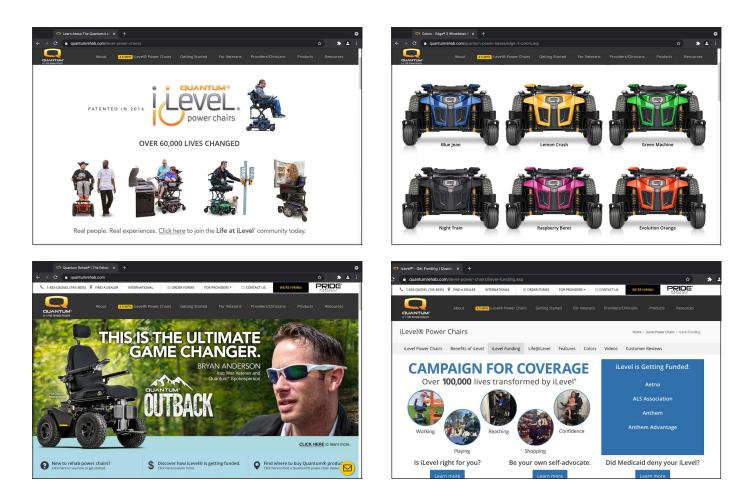

QUANTUMREHAB.COM

Quantum's official website is the ultimate source for everything you need to know about Quantum[®] products. Highlights include detailed product specifications, order forms, videos, user testimonials and much more.


SERVICE

AND SUPPORT




LIVE LENS

Connect with technical service for remote, hands-on troubleshooting from anywhere in the field. Contact our Tech Service Dept. for details.

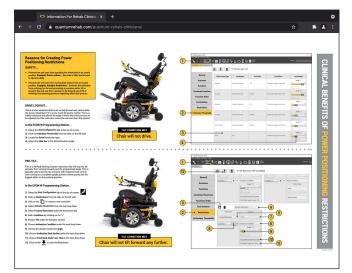

CLINICAL RESOURCES

The Clinical Resources section of the Quantum website is specifically tailored to clinicians' needs, featuring order forms, clinical references, and reimbursement information.

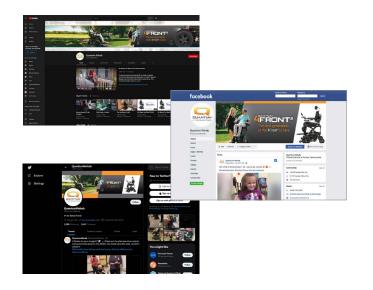

SOCIAL MEDIA

Stay up to date on the latest Quantum[®] events and product releases through Twitter, Facebook, YouTube, Instagram and TikTok.





STEALTHPRODUCTS.COM

Stealth Products[®] launched in 1999, in response to a need for versatile, high-quality head and neck positioning systems, as well as switch site location hardware. Their products include: head and body support/positioning, joystick mounts, trays, seating, cushions, and pediatric mobility products.



LĮUAIN I UM°		OUTBACK	STRETTO
#1 FOR REHAB POWER	HCPCS CODES For more information on HCPCS code coverage, please consult our Product Planning & Reimbursement Center.	K0899 - Power Mobility Device, Not coded by DME PDAC	Group 3: Standard (K0848/K0849), Single Power (K0856/K0857), Multiple Power (K0861)
 2) Optional 3) Requires HD Suspension 4) Speed varies with user weight, terrain type 	AVAILABLE ON VA CONTRACT	Coming Soon to FSS Contract	FSS Contract V797D-70001
 battery charge, battery condition and tire pressure. 	WEIGHT CAPACITY ⁷	300 lbs. (350 lbs. w/ Q-Captain)	300 lbs.
 Without front riggings Battery capacity may change when adding power positioning systems. Weight capacity is dictated by the selection of seating. 	MAXIMUM SPEED ⁴	Up to 5 mph (6 mph with high speed package)	Up to 6.25 mph (3.5 mph with iLevel®) ¹³
 All measurements +/- 1/8" with 18" x 18" seat, fixed towers, 300 lbs. weight capacity and solid tires (add 3/8" with pneumatic tires). Depths 	GROUND CLEARANCE	4.92" (at motors)	2.9"
may increase seat-to-floor height. Contact Customer Service for details. Listed	TURNING RADIUS ⁵	49.2"	21"
measurements are in the lowest position; does not include elevating system unless	LENGTH 11	42"	36"
specified. 9) 250 lbs. weight capacity with TRU-Balance® 10) A minimum seating size of 20" x 20" is required with iLevel® on the Q6 Edge® HD; maximum	WIDTH	28.82"	21.5" (14" drive wheels) 20.47" (12.5" drive wheels)
seating size is 24" x 24" 11) Without foot riggings 12) All Quantum units can be ordered with specialty controls 13) 6.25 mph speed available only with Q-Logic 3.	DRIVE WHEELS	15" pneumatic	14" or 12.5" pneumatic or flat free tires; Optional: 14" knobby
 14) Battery weight may vary +/- 3 lbs. based on manufacturer. 15) Reduced to 400 lbs. with iLevel® power adjustable seat height 	CASTER WHEELS	N/A	Front: 5" flat free Rear: 6" flat free
16) Seat-to-floor heights are measured with the unit unloaded. Due to the 4Front's suspension	ANTI-TIP WHEELS	N/A	N/A
system, seat-to-floor heights are approximately 0.25" lower when the unit is loaded.	BASE WEIGHT	168.6 lbs.	126.4 lbs.
17) 7 mph can only be achieved with optional 4-pole motors and Q-Logic 3. Maximum speed without 4-pole motors is 6.25 mph with Q-Logic 3.	BATTERY WEIGHT ¹⁴	58.6 lbs.	40 AH: 31 lbs. each NF-22: 40 lbs. each
	DRIVE WHEEL CONFIGURATION	4 Motor, Independent Drive	Mid-wheel Drive
HCPCS codes provided should not be considered as	MOTOR PACKAGES	4-pole	2-pole
legal advice and do not guarantee reimbursement. DME providers are responsible for determining	BATTERIES ⁶	Group 27	40AH (2) or NF-22 (2)
appropriate billing codes when submitting for insurance reimbursement. The information contained herein	BATTERY CHARGER	8A Off-board	8A Off-board
is correct at the time of publication. We reserve the right to alter specifications without prior notice.	AVAILABLE ELECTRONICS ¹²	120A Q-Logic 3	120A Q-Logic 3; 75A Q-Logic NE; 75A Q-Logic NE+
	SEATING SIZES		
	TRU-BALANCE® 4	N/A	W: 16-22" D: 14-22"
	SYNERGY®	N/A	W: 10-22" D: 10-22"
	TRU-BALANCE [®] 3 STATIC	N/A	W: 12-22" D: 12-22"
	TRU-BALANCE® 3 POWER TILT	W: 16-22" D: 16-20"	W: 12-22" D: 12-22"
	TRU-BALANCE [®] 3 LIFT & TILT	W: 16-22" D: 16-20"	W: 12-22" D: 12-22"
		N/A	N/A
			N/A
		N/A	W: 15-22" D: 15-20"
	Q4 POWER TILT SEAT-TO-FLOOR HEIGHTS ^{13,16}	W: 16-22" D: 16-22"	N/A
	TRU-BALANCE® 4 ⁸	N/A	18-19"
	SYNERGY® / STATIC 8	N/A	16"-18" (Static only)
	POWER TILT ⁸	N/A	17.5-19.5"
	LIFT & TILT ⁸	N/A	18-20"
	TRU-BALANCE® FLEX SEAT 8	N/A	16.5-18.5"
	Q4 POWER TILT	N/A	N/A
	Q4 LIFT & TILT	N/A	N/A
40	Q CAPTAIN SEAT	Captain: 19.5-21.5"	SSP: 16.5-18.5" (Flex); 18-20" (Lift) Captain: 20.5-22.5" (Flex); 22-24" (Lift)
	OPTIONAL POWER ELEVATION	10" Safe Seat Elevation at 3.2 mph	12" iLevel [®] at 3.5 mph

OUTBACK

STRETTO









EDGE [®] 3	EDGE [®] 2.0	EDGE [®] HD	J4
Group 3:	Group 3:	Group 3:	Group 2:
Standard (K0848/K0849),	Standard (K0848/K0849),	Heavy Duty (K0850/K0851),	Standard (K0822/K0823),
Single Power (K0856/K0857), Multiple Power (K0861)	Single Power (K0856/K0857), Multiple Power (K0861)	Single Power HD (K0858), Multiple Power HD (K0862)	Single Power (K0835)
FSS Contract V797D-70001	FSS Contract V797D-70001	FSS Contract V797D-70001	FSS Contract V797D-70001
300 lbs.	300 lbs.	450 lbs. ¹⁵	300 lbs.
Up to 6.25 mph ¹³	Up to 6.25 mph ¹³	Up to 4.7 mph	Up to 5 mph
Optional: Up to 7 mph ¹⁷ (4.5 mph with iLevel®)	(3.5 mph with iLevel®)	(3.5 mph with iLevel®)	
2.7" (battery tray)	2.7" (battery tray)	3" (base frame)	2.9" (battery tray)
20.5"	20.5"	19.75″	21"
35.5"	35.5″	35.6"	35.5″
24.4"	24.4"	26.25"	24.5"
14" Solid Optional: 14" Pneumatic; 14" Knobby	14" Solid Optional: 14" Pneumatic; 14" Knobby	14" Run Flat Optional: 14" Pneumatic; 14" Knobby	14" Flat Free
Front: 6" Solid Rear: 6" Solid	Front: 6" Solid Rear: 6" Solid	Front: 6" Solid Rear: 6" Solid	Front: 6″ Solid Rear: 6″ Solid
N/A	N/A	N/A	N/A
138.6 lbs.	138.6 lbs.	143.5 lbs.	131.6 lbs.
40 lbs. each	40 lbs. each	52 lbs. each	40 lbs. each
Mid-wheel Drive	Mid-wheel Drive	Mid-wheel Drive	Mid-wheel Drive
2-pole (Optional: 4-pole)	2-pole	4-pole	2-pole
NF-22 (2)	NF-22 (2)	Group 24 (2)	NF-22 (2)
8A Off-board	8A Off-board	8A Off-board	8A Off-board
120A Q-Logic 3; 75A Q-Logic NE; 75A Q-Logic NE+	120A Q-Logic 3; 75A Q-Logic NE; 75A Q-Logic NE+	120A Q-Logic 3; 75A Q-Logic NE; 75A Q-Logic NE+	75A Q-Logic NE; 75A Q-Logic NE+
	1		
W: 16-22" D: 14-22"	N/A	N/A	N/A
W: 10-22" D: 10-22"	W: 10-22" D: 10-22"	W: 20-28" D: 15-28"	N/A
W: 12-22" D: 12-22"	W: 12-22" D: 12-22"	N/A	N/A
W: 12-22" D: 12-22"	W: 12-22" D: 12-22"	N/A	N/A
W: 12-22" D: 12-22"	W: 12-22" D: 12-22"	N/A	N/A
N/A	N/A	W: 20-32" D: 20-25"	N/A
N/A	N/A	W: 20-32" D: 20-25"	N/A
N/A	N/A	W: 20-24" D: 20-25" ¹⁰	N/A
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
W: 15-22" D: 15-20"	W: 15-22" D: 15-20"	N/A	W: 15-22" D: 15-20"
N/A	N/A	N/A	W: 16-20" D: 16-22"
17.5-19.25"		N/A	N/A
	N/A	16.5-18.5"	
Synergy®: 15.875 - 20.875" Static: 16.5 - 18.5"	Synergy®: 15.875 - 20.875" Static: 16.5 - 18.5"	10.5-18.5	N/A
17.5-19.5″	17.5-19.5″	18.5-20.5"	N/A
17.5-19.5"	17.5-19.5"	18.5-20.5"	N/A
16.5-18.25"	16.5-18.25"	N/A	16.5-18.25"
N/A	N/A	N/A	17.25-19.25"
N/A	N/A	N/A	N/A
SSP: 16.5-18.25" (Flex); 17.5-19.5" (Lift) Captain: 20.5-22.5" (Flex); 21.5-23.25" (Lift)	SSP: 16.5-18.25" (Flex); 17.5-19.5" (Lift) Captain: 20.5-22.5" (Flex); 21.5-23.25" (Lift)	SSP: 16.5-18.5" (Static TB3) Captain: 20.5-22.5" (Static TB3)	N/A
12" iLevel® at 4.5 mph	12" iLevel® at 3.5 mph	12" iLevel® at 3.5 mph	N/A



Standard
 Optional
 Gequires HD Suspension
 Speed varies with user weight, terrain type
 battery charge, battery condition and tire

battery charge, battery condition and tire pressure.
5) Without front riggings
6) Battery capacity may change when adding power positioning systems.
7) Weight capacity is dictated by the selection of seating.
8) All measurements +/- 1/8" with 18" x 18" seat, fixed towers, 300 lbs. weight capacity and solid tires (add 3/8" with pneumatic tires). Depths may increase seat-to-floor height. Contact Customer Service for details. Listed measurements are in the lowest position; does not include elevating system unless

does not include elevating system unless specified.9) 250 lbs. weight capacity with TRU-Balance[®]

9) 250 lbs. weight capacity with TRU-Balance[®]
10) A minimum seating size of 20" x 20" is required with iLeve[®] on the 06 Edge[®] HD; maximum seating size is 24" x 24"
11) Without foot riggings
12) All Quantum units can be ordered with specialty controls
13) 6.25 mph speed available only with Q-Logic 3.
14) Battery weight may vary +/- 3 lbs. based on manufacturer.
15) Reduced to 400 lbs. with iLevel® power adjustable seat height
16) Seat-to-floor heights are measured with the unit unloaded. Due to the 4Front's suspension system, seat-to-floor heights are approximately 0.25" lower when the unit is loaded.
17) 7 mph can only be achieved with optional

Quantum[®] Power Chairs are FDA Class II Medical Devices designed to aid individuals with mobility impairments.







J4E J4 HD J6 Processionantics of ALCPECONS Bright Power (KOBS) Group 2: Stude Power (KOBS) Stude 2: Stude Power (KOBS) Stude 2: Stude Power (KOBS) AVAILABLE ON VA CONTRACT Coming Soon FSS Contract V797b-70001 FSS Contract V797b-70001 MEIGHT CAPACITY 300 hs. 400 hs. 300 hs. 300 hs. MAXAMAMA SPEED Up to 5 mph Up to 4 mph 2* (caster arma) TURNING RADUE 3: QSET 2.5* 2* 2* LENGTH 3: SS 35.5* 34.7* 2* LENGTH 3: SS 35.5* 34.7* 2* LENGTH 3: SS 35.5* 34.7* 2* LENGTH 3: SS Yeidid 7* fail Free 07 solid ORIVE WHEELS 14* Solid Front 6* Solid Front 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Front 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid Res: 6* Solid		_		
Bindle Power (K0835)Single Power (K0835)Single Power (K0835)Single Power (K0835)AVALABLE ON VA CONTRACTComing SoonPSS Contract V797D 70001PSS Contract V797D 70001WEIGHT CAPACITY300 lbs.400 lbs.300 lbs.300 lbs.MAXIMUM SPEED*Up to 5 mphUp to 5 mphUp to 4 mphGROUND CLEARANCE37 Cleatery tray)2.9" (caster arms)2.2" (caster arms)TURNING RADUES*30.5"3.5"3.5.5"3.5.7"ORIVE WHEELS14" Solid14" Flat Frae10" SolidORIVE WHEELSFont 6" SolidRest 6" SolidRest 6" SolidAMATTATY DWHEELSN/AN/AN/ABAST ERV WHEELSFont 6" SolidRest 6" SolidRest 6" SolidBAST ERV WHEELSN/AN/AN/AN/ABAST ERV WHEELSN/AN/AN/AN/ABAST ERV WHEELSN/AN/AN/AN/ABAST ERV WHEELSN/AN/AN/AN/ABAST ERV WHEELSSolidRest 6" SolidRest 6" SolidBATTERY WHEELSN/AN/AN/AN/ABATTERY WHEELSN/AN/AN/ABATTERY WHEELSN/AN/AN/ABATTERY WHEELSACALOGIC RESTN/AN/ABATTERY GLAARGERBAOHSband3AOHSband3AOHSbandTAVALABLE ELECTRNOIDER12AO (Logic SETAO (Logic NE+72A (Logic NE+TURBALANCE* SINTERN/AN/AN/AN/ABATTERY GLAARGERN/AN		J4E	J4 HD	J6
WEIGHT CAPACITY*300 lbs.400 lbs.300 lbs.MAXIMUM SPEEDUp to 5 mphUp to 5 mphUp to 5 mphUp to 4 mphGROUND CLEARANCE3' (battery tray)2' (caster arms)2'' (caster arms)TURNING RADUS*20.5'21''22'MOTH24.4''24.5''23.19''DRIVE WHELS14'' Solid14'' Flat Free10'' SolidDRIVE WHELSN/AN/A10'' SolidRear-6' SolidFront: 6' SolidFront: 5' SolidRear-6' SolidRear-6' SolidRear-6' SolidRear-6' SolidRear-6' SolidRear-6' SolidBATTERY WEIGH*138 lbs. each40 lbs. each23.4 lbs. eachDRIVE WHEELN/AN/AN/ABATTERY WEIGH*138 lbs. each40 lbs. each23.4 lbs. eachDRIVE WHEEL ONFOULHATIONMid wheel DriveMid wheel DriveMid wheel DriveMOTOR PACKAGES2 (pole4 pole2 poleBATTERY OHARGERBA Off-boardBA Off-boardSA Off-boardSKATING SIZESTRU-BALANCE'S STATION/AN/ATRU-BALANCE'S STATION/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDERTITN/AN/AN/ATRU-BALANCE'S SIDE STATIO	For more information on HCPCS code coverage, please consult our Product			Standard (K0822/K0823),
MAXIMUM SPEED*Up to 5 mphUp to 5 mphUp to 4 mphGROUND CLARANCE3' (battery tray)2.5''21''22'LENGTH135.5'35.5''34.74''WIDTH24.4''24.5''23.19''DRIVE WHEELS14''Solid14''Flat Free0''Solid Optional: 10' Procuratic Description 10'' ProcuraticCASTER WHEELSFord: 5' Solid Rear 6' SolidFord: 5' Solid Rear 6' SolidFord: 5' Solid Rear 6' SolidANT-TIP WHEELSN/AN/AN/ABASE WEIGH138 bits131.6 lbs.100.2 lbs.BATTERY WHEELS138 bits131.6 lbs.100.2 lbs.BATTERY WHEELSN/AN/AN/ADRIVE WHEEL CONFIGURATIONMid wheel DriveMid wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERY WHEELSN/2 (2)NF-22 (2)U-1 (2)BATTERY WHEELSN/AM/AN/ADRIVE WHEEL CONFIGURATIONMid wheel DriveMid wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERY CHARGESN/AN/AN/AN/A LABLE ELECTORONG ST75A Q-Logic NE+ 75A Q-Logic NE+ 	AVAILABLE ON VA CONTRACT	Coming Soon	FSS Contract V797D-70001	FSS Contract V797D-70001
GROUND CLEARANCES'(buttery tray)2.9" (battery tray)2" (caster arms)TURNING RADUS20.5"21"22"LENGTH35.5"35.5"34.74"WIDTH24.4"24.5"23.19"DRVE WHEELS14" Solid14" Flat Free10" SolidCASTER WHEELS14" SolidFreet 6" SolidFreet 6" SolidANT-TIP WHEELS1/4" SolidFreet 6" SolidFreet 6" SolidANT-TIP WHEELSN/AN/AN/ABASE WEIGHT38 lbs131.6 lbs100.2 lbsBATTERY WEIGHT38 lbs60 ff-board8.0 ff-boardMOTOR PACKAGES2 pole4 pole2 poleBATTERY ORACESNF-22 (2)NF-22 (2)I-1 (2)BATTERY ORACES175.4 Q-Logic NE+75.6 Q-Logic NE+SALAD Q-LOGIC SE75.6 Q-Logic NE+75.6 Q-Logic NE+STRU-BALANCE*10.7 AN/AN/AWALALANCE*10.7 AN/AN/ASYLERYN/AN/AN/ATRU-BALANCE*3.1 AN/AN/ATRU-BALANCE*10.7 AN/AN/ATRU-BALANCE*3.1 AN/AN/ATRU-BALANCE*3.1 AN/AN/ATRU-BALANCE*10.7 AN/AN/ATR	WEIGHT CAPACITY 7	300 lbs.	400 lbs.	300 lbs.
TURNING RADIUS ⁵ 21.5 21" 22" LENGTH ¹¹ 35.5 35.5" 34.74" WIDTH 24.4" 24.5" 23.19" DRIVE WHEELS 14" Solid 14" Flat Free 10" Solid CASTER WHEELS 14" Solid 14" Flat Free 10" Solid CASTER WHEELS N/A N/A N/A ANT-TIP WHEELS N/A N/A N/A BASE WEIGHT 138.6 lbs. 131.6 lbs. 100.2 lbs. BATTERY WEIGHT ¹⁴ 38 lbs. each 40 lbs. each 23.4 lbs. each DRIVE WHEEL CORFIGURATION Mid-wheel Drive Mid-wheel Drive Mid-wheel Drive MOTOR PACKAGES 2-pole 4-pole 2-pole BATTERY CHARGER BA Off-board SA Off-board 5A Off-board AVAILABLE ELECTRONICS ¹² 120.0 q-Logic 3E 75A Q-Logic NE+ 75A Q-Logic NE+ TRU-BALANCE ³ STATIC N/A N/A N/A W1420" D1420" TRU-BALANCE ³ STATIC N/A N/A N/A N/A 10.22" <	MAXIMUM SPEED ⁴	Up to 5 mph	Up to 5 mph	Up to 4 mph
ILENOTH ¹¹ 35.5" 35.5" 34.74" WIDTH 24.4" 24.5" 23.19" DRIVE WHEELS 14" Solid 14" Flat Free 10" Solid CASTER WHEELS Front 6" Solid Rear 6" Solid Rear 6" Solid ANTI-TIP WHEELS N/A N/A N/A BASE WEIGHT 136.10b. 100.2 lbs. 100.2 lbs. BATTERY WEIGHT ¹⁴ 38 lbs. each 40 lbs. each 23.4 lbs. each DRIVE WHEEL CONFIGURATION Mid-wheel Drive Mid-wheel Drive Mid-wheel Drive MOTOR PACKAGES 2.pole 4.pole 2.pole BATTERY CHARGER 8.0 If/board 8.0 Off-board 5.0 Off-board AVAILABLE LECTRONICS ¹² 120.0 Clogic 38" 75.0 Clogic NE" 75.0 Clogic NE" TRU-BALANCE ² 3 STATIC N/A N/A N/A W1420" D: 1420" TRU-BALANCE ² 3 STATIC N/A N/A W1420" D: 1420" TRU-BALANCE ² 3 HID FATTL N/A N/A N/A TRU-BALANCE ² 3 HID FATTL N/A N/A N/A <th>GROUND CLEARANCE</th> <th>3" (battery tray)</th> <th>2.9" (battery tray)</th> <th>2" (caster arms)</th>	GROUND CLEARANCE	3" (battery tray)	2.9" (battery tray)	2" (caster arms)
WIDT24.4"24.5"23.19"DRIVE WHELS14" Solid14" Flat Free10" SolidCASTER WHELSFont: 6" SolidRear: 6" SolidRear: 6" SolidANTI-TIP WHELSN/AN/AN/ABASE WHELSSolidRear: 6" SolidRear: 6" SolidBASE WHELSSolidRear: 6" SolidRear: 6" SolidBASE WHELSSolidN/AN/ABASE WHELSSolid131.6 fbs.100.2 fbs.BATTERY WEIGHT38 fbs.131.6 fbs.100.2 fbs.BATTERY WEIGHT38 fbs.40 fbs. each23.4 fbs. eachDRIVE WHELCONFIGURATIONMid-wheel DriveMid-wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERY CHARGERBA Off-boardBA Off-board5A Off-boardAVAILABLE ELETRONICS ¹² 75A Q-Logic NE+75A Q-Logic NE+75A Q-Logic NE+TU-BALANCE*4N/AN/AN/AN/ASYNERGYN/AN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*3 STATICN/AN/AN/ATU-BALANCE*4	TURNING RADIUS ⁵	20.5"	21"	22"
DRIVE WHEELS 14" Solid 14" Flat Free 10" Solid CASTER WHEELS Front: 6' Solid Front: 6' Solid Front: 6' Solid Rear: 6' Solid Rear: 6' Solid Rear: 6' Solid Rear: 6' Solid ANTI-TIP WHEELS N/A N/A N/A BASE WEIGHT 138.6 lbs. 131.6 lbs. 100.2 lbs. BATTERY WEIGHT 14 38 lbs. each 40 lbs. each 23.4 lbs. each DRIVE WHEEL ONG PACKAGES 2 pole 4 pole 2 pole BATTERY WEIGHT 14 38 lbs. each 40 lbs. each 23.4 lbs. each DRIVE WHEEL CONFIGURATION Mid-wheel Drive Mid-wheel Drive Mid-wheel Drive MOTOR PACKAGES 2 pole 4 pole 2 pole SATTERY CHARGER BA Offboard BA Offboard 50.0 fboard AVAILABLE ELECTRONICS 12 120.0 Cl-togic XE 75A Q-Logic NE+ 75A Q-Logic NE+ SEATING SIZES TRU-BALANCE' 4 N/A N/A W14.20° D 14.20° TRU-BALANCE' 3 STATIC N/A N/A W14.20° D 14.20° TRU-BALANCE' 3 STATIC N/A N/A N/A TRU-BALANCE' 3 HD STATIC N/A N/A N/A TRU-BALANCE' 3 HD STATIC N/A N/A N/A	LENGTH 11	35.5"	35.5"	34.74"
Optional: 10* Pneumatic CASTER WHEELS Rear: 6* Solid Port: 6* Solid Port: 6* Solid Port: 6* Solid ANTI-TIP WHEELS N/A N/A N/A N/A BASE WEIGHT 138.6 lbs. 131.6 lbs. 100.2 lbs. BATTERY WEIGHT 38 lbs.each 40 lbs.each 23.4 lbs.each DRIVE WHEEL CONFIGURATION Md-wheel Drive Md-wheel Drive Md-wheel Drive MOTOR PACKAGES 2-pole 4-pole 2-pole BATTERY CHARGES 8.0 Off-board BA Off-board 5.0 Off-board AVAILABLE ELECTRONICS 10 120.4 Off-board BA Off-board 5.0 Off-board SEATING SIZES TRU-BALANCE*4 N/A N/A N/A TRU-BALANCE*3 STATIC N/A N/A W14:20* D:14:20* TRU-BALANCE*3 STATIC N/A N/A N/A TRU-BALANCE*3 STATIC N/A N/A N/A TRU-BALANCE*3 HD POWER TILT N/A N/A N/A TRU-BALANCE*3 HD DETATIC N/A N/A N/A TRU-BALANCE*3 HD DETATIC	WIDTH	24.4"	24.5"	23.19"
Rear: 6' SolidRear: 6' SolidRear: 6' SolidANTI-TIP WHEELSN/AN/AN/ABASE WEIGHT138.6 lbs.131.6 lbs.100.2 lbs.BATTERY WEIGHT38 lbs. each40 lbs. each23.4 lbs. eachDRIVE WHEEL CONFIGURATIONMid-wheel DriveMid-wheel DriveMid-wheel DriveMOTOR PACKAGE2 pole4 pole2 poleBATTERY SP.P.22 (2)NF.22 (2)U.1 (2)BATTERY CHARGER8A Off-board8A Off-board5A Off-boardAVAILABLE ELECTRONICS 12120.4 Q-logic SE75A Q-logic NE+TRU-BALANCE*3 SCALOGIC NE+75A Q-logic NE+75A Q-logic NE+TRU-BALANCE*3 STATICN/AN/AW1420* D:1420*TRU-BALANCE*3 STATICN/AN/AW1420* D:1420*TRU-BALANCE*3 STATICN/AN/AN/ATRU-BALANCE*3 STAT	DRIVE WHEELS	14" Solid	14" Flat Free	
BASE WEIGHT138.6 lbs.131.6 lbs.100.2 lbs.BATTERY WEIGHT138.6 lbs.131.6 lbs.100.2 lbs.BATTERY WEIGHT38 lbs. each40 lbs. each23.4 lbs. eachDRIVE WHEEL CONFIGURATIONMid-wheel DriveMid-wheel DriveMid-wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERY CHARGER8A Off-board5A Off-board5A Off-boardAVAILABLE ELEOTRONICS120.0 CLogic SE75A C-Logic NE+75A Q-Logic NE+SEATING SIZES120.0 CLogic SE75A Q-Logic NE+75A Q-Logic NE+TRU-BALANCE*4N/AN/AW: 1420° D: 1420°TRU-BALANCE*3 STATICN/AN/AW: 1420° D: 1420°TRU-BALANCE*3 STATICN/AN/AW: 1420° D: 1420°TRU-BALANCE*3 HD STATICN/AN/AN/ATRU-BALANCE*3 HD STATICN/AN/AN/A <t< th=""><th>CASTER WHEELS</th><th></th><th></th><th></th></t<>	CASTER WHEELS			
BATTERY WEIGHT ¹⁴ 38 lbs. each40 lbs. each23.4 lbs. eachDRIVE WHEEL CONFIGURATIONMid-wheel DriveMid-wheel DriveMid-wheel DriveMid-wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERIES ⁶ NF-22 (2)NF-22 (2)U1 (2)BATTERY CHARGER8A Off-board8A Off-board5A Off-boardAVAILABLE ELECTRONICS ¹² 120A Q-Logic 3E75A Q-Logic NE+75A Q-Logic NE+TRU-BALANCE ¹⁴ N/AN/AN/AN/ASEATING SIZESN/AN/AN/AW:1420"TRU-BALANCE ¹⁵ 3 STATICN/AN/AW:1420"D:1420"TRU-BALANCE ² 3 STATICN/AN/AW:1420"D:1420"TRU-BALANCE ² 3 HD STATICN/AN/AN/ATRU-BALANCE ² 4 HD SOWER TILTN/AN/AN/ATRU-BALANCE ² 4 HD SOWER TILTN/AN/AN/ATRU-BALANCE ² 4 HD STATICN/AN/AN/ATRU-BALANCE ² 4 HD STATICN/AN/AN/ATRU-BALANCE ² 4 HD STATICN/AN/AN/ATRU-BALANCE ² 4 HD STATICN/AN/AN/ATRU-BALANCE ²	ANTI-TIP WHEELS	N/A	N/A	N/A
DRIVE WHEEL CONFIGURATIONMid-wheel DriveMid-wheel DriveMid-wheel DriveMOTOR PACKAGES2-pole4-pole2-poleBATTERIES*NF-22 (2)NF-22 (2)U1 (2)BATTERY CHARGESBA Off-boardBA Off-boardSA Off-boardAVAILABLE ELECTRONICS**120A Cl-Logic 3E TSA Q-Logic NE+ (coming soon)TSA Q-Logic NE+SEATING SIZESV/AN/AN/ATRU-BALANCE*4N/AN/AW: 10-22* D: 10-22*TRU-BALANCE*3 STATICN/AN/AW: 14-20* D: 14-20*TRU-BALANCE*3 STATICN/AN/AW: 14-20* D: 14-20*TRU-BALANCE*3 STATICN/AN/AN/ATRU-BALANCE*3 HD STATICN/AN/AN/ATRU-BALANCE*3 HD STATICN/AN/AN/ATRU-BALANCE*3 HD DATATICN/AN/AN/ATRU-BALANCE*3 HD DATATICN/AN/AN/ATRU-BALANCE*3 HD DATATICN/AN/AN/ATRU-BALANCE*3 HD DATATICN/AN/AN/ATRU-BALANCE*3 HD DATATICN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/A	BASE WEIGHT	138.6 lbs.	131.6 lbs.	100.2 lbs.
MOTOR PACKAGES2-pole4-pole2-poleBATTERIS*NF-22 (2)NF-22 (2)U-1 (2)BATTERY CHARGERBA Off-boardBA Off-boardSA Off-boardAVAILABLE ELECTRONICS ¹² 120A Q-Logic 3E 75A Q-Logic NE+75A Q-Logic NE+ 75A Q-Logic NE+SEATING SIZESTRU-BALANCE*4N/AN/AN/AN/AN/AN/ASYNERGYN/AN/AN/AYNAN/AN/AW: 10-22*D: 10-22*N/AN/AN/AYU-BALANCE*3 STATICN/AN/AW: 14-20*TRU-BALANCE*3 STATICN/AN/AN/ATRU-BALANCE*3 IDFT & TILTN/AN/AN/ATRU-BALANCE*3 ID FOWER TILTN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/AN/ASEATTO-FLOOR HEIGHTS****TTN/ATRU-BALANCE*4 N/AN/AN/AN/ASYNERGY*/STATIC*N/AN/AN/ASYNERGY*/STATIC*N/AN/AN/ASYNERGY*/STATIC*<	BATTERY WEIGHT ¹⁴	38 lbs. each	40 lbs. each	23.4 lbs. each
BATTERIES*NF-22 (2)NF-22 (2)U1 (2)BATTERY CHARGERBA Off-boardBA Off-board5A Off-boardAVAILABLE ELECTRONICS 12120A Q-Logic 3E T5A Q-Logic NE+ (coming soor)75A Q-Logic NE+75A Q-Logic NESEATING SIZESTRU-BALANCE* 4N/AN/AN/ASYNERGY*N/AN/AN/AW: 10-22*D: 10-22*TRU-BALANCE* 3 STATICN/AN/AN/AW: 14-20*D: 14-20*TRU-BALANCE* 3 FOWER TILTN/AN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/ATRU-BALANCE* 3 HD DETT & TILTN/AN/AN/ATRU-BALANCE* 3 HD DETT & TILTN/AN/AN/ATRU-BALANCE* 3 HD DETT & TILTN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 2 HD POWER TILTN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 4 MN/AN/AN/ASEAT-TO-FLOOR HEIGHTS133/TRU-BALANCE* 4*N/ATRU-BALANCE* 4*N/AN/AN/ASEAT-TO-FLOOR HEIGHTS133/TRU-BALANCE* 4*N/ATRU-BALANCE* 4*N/AN/AN/ASYNERGY* / STATIC*N/AN/AQ 4 POWER TILTN/AN/ATRU-BALANCE* 4**	DRIVE WHEEL CONFIGURATION	Mid-wheel Drive	Mid-wheel Drive	Mid-wheel Drive
BATTERY CHARGERBA Off-boardBA Off-boardAVAILABLE ELECTRONICS120A Q-Logic SE T5A Q-Logic NE+ (coming soon)75A Q-Logic NE+75A Q-Logic NE+SEATING SIZES75A Q-Logic NE+75A Q-Logic NE+TRU-BALANCE*N/AN/AN/AN/ASYNERGY*N/AN/AN/AW: 10-22*TRU-BALANCE*3 STATICN/AN/AW: 14-20*TRU-BALANCE*3 POWER TILTN/AN/AW: 14-20*TRU-BALANCE*3 LIFT & TILTN/AN/AN/ATRU-BALANCE*3 HD STATICN/AN/AN/ATRU-BALANCE*3 HD FOWER TILTN/AN/AN/ATRU-BALANCE*3 HD DOWER TILTN/AN/AN/ATRU-BALANCE*3 HD DOWER TILTN/AN/AN/ATRU-BALANCE*3 HD DOWER TILTN/AN/AN/ATRU-BALANCE*2 HD STATICN/AN/AN/ATRU-BALANCE*2 HD POWER TILTN/AN/AN/ATRU-BALANCE*2 HD POWER TILTN/AN/AN/ATRU-BALANCE*2 HD POWER TILTN/AN/AN/ATRU-BALANCE*2 HD POWER TILTN/AN/AN/ATRU-BALANCE*2 HD POWER TILTN/AN/AN/ATRU-BALANCE*1 HON/AN/AN/ATRU-BALANCE*1 HON/AN/AN/ATRU-BALANCE*1 HON/AN/AN/ATRU-BALANCE*1 HAN/AN/AN/A	MOTOR PACKAGES	2-pole	4-pole	2-pole
AVAILABLE ELECTRONICS 12 TRU-BALANCE 14120.A Q-Logic SE TSA Q-Logic NE+ (coming soon)75A Q-Logic NE+75A Q-Logic NE 75A Q-Logic NE+SEATING SIZESTRU-BALANCE 14N/AN/AN/ASYNERQYN/AN/AW: 10-22" D: 10-22"TRU-BALANCE 15 STATICN/AN/AW: 14-20" D: 14-20"TRU-BALANCE 15 POWER TILTN/AN/AW: 14-20" D: 14-20"TRU-BALANCE 15 POWER TILTN/AN/AN/ATRU-BALANCE 15 POWER TILTN/AN/AN/ATRU-BALANCE 15 HO STATICN/AN/AN/ATRU-BALANCE 2 HD POWER TILTN/AN/AN/ATRU-BALANCE 2 HD STATICN/AN/AN/ATRU-BALANCE 2 HD POWER TILTN/AN/AN/ATRU-BALANCE 2 HD POWER TILTN/AN/AN/ATRU-BALANCE 2 HD STATICN/AN/AN/ATRU-BALANCE 2 HD STATICN/AN/AN/ATRU-BALANCE 2 HD STATICN/AN/AN/ATRU-BALANCE 2 HD POWER TILTN/AN/AN/ATRU-BALANCE 2 HD STATIC 4N/AN/AN/ATRU-BALANCE 2 HD POWER TILTN/AN/AN/ATRU-BALANCE 2 HD POWER TILT 4N/AN/AN/ATRU-BALANCE 2 HD POWER TILT 4N/AN/A	BATTERIES ⁶	NF-22 (2)	NF-22 (2)	U-1 (2)
75A Q-Logic NE+ (coming soon) Table Status SEATING SIZES N/A N/A TRU-BALANCE*4 N/A N/A SYNERGY* N/A N/A TRU-BALANCE*3 STATIC N/A N/A TRU-BALANCE*3 STATIC N/A N/A TRU-BALANCE*3 SPOWER TILT N/A N/A TRU-BALANCE*3 POWER TILT N/A N/A TRU-BALANCE*3 IJFT & TILT N/A N/A TRU-BALANCE*3 HD STATIC N/A N/A TRU-BALANCE*3 HD STATIC N/A N/A TRU-BALANCE*3 HD STATIC N/A N/A TRU-BALANCE*3 HD DUFT & TILT N/A N/A TRU-BALANCE*3 HD DUFT & TILT N/A N/A TRU-BALANCE*1 V/A N/A N/A TRU-BALANCE*1 T N/A N/A TRU-BALANCE*2 HD POWER TILT N/A N/A Q4 POWER TILT N/A N/A TRU-BALANCE*4 N/A N/A SYNERGY*/STATIC* N/A N/A SYNERGY*/STATIC* N/A <	BATTERY CHARGER	8A Off-board	8A Off-board	5A Off-board
SEATING SIZES TRU-BALANCE" 4 N/A N/A N/A SYNERGY N/A N/A N/A W: 10-22" D: 10-22" TRU-BALANCE*3 STATIC N/A N/A W: 14-20" D: 14-20" TRU-BALANCE*3 POWER TILT N/A N/A W: 14-20" D: 14-20" TRU-BALANCE*3 POWER TILT N/A N/A N/A M/A TRU-BALANCE*3 ILIT & TILT N/A N/A N/A TRU-BALANCE*3 HD FOWER TILT N/A N/A N/A TRU-BALANCE*3 HD POWER TILT N/A N/A N/A TRU-BALANCE*3 HD LIFT & TILT N/A N/A N/A TRU-BALANCE*3 HD POWER TILT N/A N/A N/A TRU-BALANCE*2 HD STATIC N/A N/A N/A GeAPTORTLT N/A N/A N/A	AVAILABLE ELECTRONICS ¹²		75A Q-Logic NE+	
TRU-BALANCE" 4 N/A N/A N/A SYNERGY" N/A N/A W: 10-22" D: 10-22" TRU-BALANCE" 3 STATIC N/A N/A W: 14-20" D: 14-20" TRU-BALANCE" 3 POWER TILT N/A N/A W: 14-20" D: 14-20" TRU-BALANCE" 3 ILFT & TILT N/A N/A W: 14-20" D: 14-20" TRU-BALANCE" 3 HD STATIC N/A N/A N/A N/A TRU-BALANCE" 3 HD STATIC N/A N/A N/A N/A TRU-BALANCE" 3 HD STATIC N/A N/A N/A N/A TRU-BALANCE" 3 HD POWER TILT N/A N/A N/A N/A TRU-BALANCE" 3 HD POWER TILT N/A N/A N/A N/A TRU-BALANCE" 4 D STATIC N/A N/A N/A N/A TRU-BALANCE" 2 HD STATIC N/A N/A N/A N/A TRU-BALANCE" 4 LEX SEAT N/A N/A N/A Synergy": 15.875-17.875" Static: 10.75" N/A N/A N/A Synergy": 15.87		/5A Q-Logic NE+ (coming soon)		/5A Q-Logic NE+
SYNERGYN/AN/AW: 10-22"D: 10-22"TRU-BALANCE" 3 STATICN/AN/AW: 14-20"D: 14-20"TRU-BALANCE" 3 POWER TILTN/AN/AN/AN/ATRU-BALANCE" 3 LIFT & TILTN/AN/AN/ATRU-BALANCE" 3 HD STATICN/AN/AN/ATRU-BALANCE" 3 HD STATICN/AN/AN/ATRU-BALANCE" 3 HD DWER TILTN/AN/AN/ATRU-BALANCE" 3 HD LIFT & TILTN/AN/AN/ATRU-BALANCE" 2 HD STATICN/AN/AN/ATRU-BALANCE" 2 HD STATICN/AN/AN/ATRU-BALANCE" 2 HD POWER TILTN/AN/AN/ATRU-BALANCE" 2 HD POWER TILTN/AN/AN/ATRU-BALANCE" 1 LEX SEATN/AN/AN/AQ 4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS1305TSymergy": 15.875 - 17.875"SYNERGY" / STATIC 1N/AN/AN/AN/AN/AN/AN/ASYNERGY" / STATIC 2N/AN/AN/ATRU-BALANCE" FLEX SEAT 3N/AN/AN/ASYNERGY" / STATIC 3N/AN/AN/AQ 4 POWER TILT 4N/AN/AN/AQ 4 POWER TILT 17.5-19.5"17.25-19.25"N/AQ 4 LIFT AND TILT 17.5-19.5"N/AN/AQ CAPTAIN SEAT 4N/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)N/AN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) <th></th> <th>N/A</th> <th>N/A</th> <th>N/A</th>		N/A	N/A	N/A
TRU-BALANCE* 3 STATICN/AN/AW: 1420"D: 1420"TRU-BALANCE* 3 POWER TILTN/AN/AN/AW: 1420"D: 1420"TRU-BALANCE* 3 LIFT & TILTN/AN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/AN/ATRU-BALANCE* 3 HD DOWER TILTN/AN/AN/AN/ATRU-BALANCE* 3 HD LIFT & TILTN/AN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/AN/ATRU-BALANCE* 2 HD POWER TILTN/AN/AN/AN/ATRU-BALANCE* FLEX SEATN/AN/AN/AN/AQ 4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 1310WN/AN/AN/ATRU-BALANCE* 4N/AN/AN/AStatic: 16.75"SYNERGY* / STATIC 8N/AN/AN/AStatic: 16.75"SYNERGY* / STATIC 8N/AN/AN/AN/ATRU-BALANCE* 4N/AN/AN/AStatic: 16.75"SYNERGY* / STATIC 8N/AN/AN/AN/AQ 4 POWER TILT 8N/AN/AN/AN/AQ 4 LIFT & NILT 8N/AN/AN/AN/AQ 4 LIFT AND TILT17.519.5"N/AN/AN/AQ 4 LIFT AND TILT17.519.5"N/AN/AN/AQ 4 LIFT AND TILT17.519.5"N/AN/AN/AQ 4 LIFT AND TILT				
TRU-BALANCE® 3 POWER TILTN/AN/AW: 14-20"D: 14-20"TRU-BALANCE® 3 LIFT & TILTN/AN/AN/AN/ATRU-BALANCE® 3 HD STATICN/AN/AN/AN/ATRU-BALANCE® 3 HD POWER TILTN/AN/AN/AN/ATRU-BALANCE® 3 HD DIFT & TILTN/AN/AN/AN/ATRU-BALANCE® 3 HD LIFT & TILTN/AN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/AN/AQ4 POWER TILTN/AN/AN/AN/ASEAT-TO-FLOOR HEIGHTS1316N/AN/AN/ASynergy®: 15.875-17.875"Static: 16.75N/AN/AN/ASynergy®: 15.875-17.875"SYNERGY® / STATIC 8N/AN/AN/ASynergy®: 15.875-17.875"POWER TILT 8N/AN/AN/ASynergy®: 15.875-17.875"Static: 16.75N/AN/AN/AN/ATRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ4 POWER TILT 9N/AN/AN/AQ4 POWER TILT 17.519.5"17.2519.25"N/AQ4 LIFT AND TILT17.519.5"N/AN/AQ4 LIFT AND TILT17.519.5"N/AN/AQ CAPTAIN SEATN/ASSP: 16.518.5" (Flex) Captain: 20.5-22.5" (Flex)N/A				
TRU-BALANCE* 3 LIFT & TILTN/AN/AN/ATRU-BALANCE* 3 HD STATICN/AN/AN/ATRU-BALANCE* 3 HD DOWER TILTN/AN/AN/ATRU-BALANCE* 3 HD LIFT & TILTN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 2 HD STATICN/AN/AN/ATRU-BALANCE* 2 HD POWER TILTN/AN/AN/ATRU-BALANCE* 2 HD POWER TILTN/AN/AN/ATRU-BALANCE* 5 HEX SEATN/AN/AN/AQ4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 1340W: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 1340N/AN/AN/ASYNERGY* / STATIC *N/AN/AN/ASynergy*: 15.875 - 17.875"SYNERGY* / STATIC *N/AN/AN/ASynergy*: 15.875 - 17.875"SYNERGY* / STATIC *N/AN/AN/AN/ATRU-BALANCE* FLEX SEAT *N/AN/AN/ATRU-BALANCE* FLEX SEAT *N/AN/AN/AQ 4 POWER TILT *N/AN/AN/AQ 4 POWER TILT *17.519.5"17.25-19.25"N/AQ CAPTAIN SEATN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)N/A				
TRU-BALANCE® 3 HD STATICN/AN/AN/ATRU-BALANCE® 3 HD POWER TILTN/AN/AN/ATRU-BALANCE® 3 HD LIFT & TILTN/AN/AN/ATRU-BALANCE® 3 HD JIFT & TILTN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/ATRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® 4 HD POWER TILTN/AN/AN/AQ 4 POWER TILTW: 16 20° D: 16 22°W: 20-24° D: 20-24°N/ASEAT-TO-FLOOR HEIGHTS 1316TRU-BALANCE® 4 BN/AN/ATRU-BALANCE® 4 BN/AN/AN/ASYNERGY® / STATIC 8N/AN/AN/AMAN/AN/AN/APOWER TILT 8N/AN/A16.75°SYNERGY® / STATIC 8N/AN/AN/ATRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ 4 LIFT & TILT 8N/AN/AN/AQ 4 LIFT AND TILT17.519.5°17.2519.25°N/AQ CAPTAIN SEATN/ASSP: 16.518.5° (Flex) Captain: 20.5-22.5° (Flex)N/A				
TRU-BALANCE® 3 HD LIFT & TILTN/AN/AN/ATRU-BALANCE® 2 HD STATICN/AN/AN/ATRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® 7 HEX SEATN/AN/AN/AQ4 POWER TILTW: 16-20"D: 16-22"W: 20-24"D: 20-24"Q4 POWER TILTW: 16-20"D: 16-22"W: 20-24"D: 20-24"SEAT-TO-FLOOR HEIGHTS 13.16W: 16-20"D: 16-22"W: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 13.16N/AN/AN/ASYNERGY® / STATIC 8N/AN/ASynergy®: 15.875 - 17.875" Static: 16.75"POWER TILT 8N/AN/AN/APOWER TILT 8N/AN/A16.75"POWER TILT 8N/AN/AN/ATRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ 4 POWER TILT 17.519.5"17.25-19.25"N/AQ 4 LIFT AND TILT 17.519.5"N/AN/AQ CAPTAIN SEATN/ASSP: 16.518.5" (Flex) Captain: 20.5-22.5" (Flex)				
TRU-BALANCE® 2 HD STATICN/AN/AN/ATRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® 1 HZ SEATN/AN/AN/AQ4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 1316W: 20-24" D: 20-24"N/ATRU-BALANCE® 4N/AN/AN/ASYNERGY® / STATICN/AN/AN/APOWER TILTN/AN/ASynergy®: 15.875-17.875" Static: 16.75"POWER TILTN/AN/A16.75"POWER TILTN/AN/AN/ATRU-BALANCE® FLEX SEATN/AN/AAN/AN/AQ4 POWER TILTN/AN/AM/AN/AN/AM/AN/AN/AM/AN/AN/AMAN/A </th <th>TRU-BALANCE[®] 3 HD POWER TILT</th> <th>N/A</th> <th>N/A</th> <th>N/A</th>	TRU-BALANCE [®] 3 HD POWER TILT	N/A	N/A	N/A
TRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® FLEX SEATN/AN/AN/AQ4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 13.16W: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS 13.16N/AN/AN/ASYNERGY® / STATIC 8N/AN/AN/ASYNERGY® / STATIC 8N/AN/AN/APOWER TILT 8N/AN/AN/ALIFT & TILT 8N/AN/AN/ATRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ4 POWER TILT 17.5-19.5"17.25-19.25"N/AQ4 LIFT AND TILT 17.5-19.5"N/AN/AQ CAPTAIN SEATN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)N/A	TRU-BALANCE [®] 3 HD LIFT & TILT	N/A	N/A	N/A
TRU-BALANCE® 2 HD POWER TILTN/AN/AN/ATRU-BALANCE® FLEX SEATN/AN/AN/AQ4 POWER TILTW: 16-20" D: 16-22"W: 20-24" D: 20-24"N/ASEAT-TO-FLOOR HEIGHTS13.0TRU-BALANCE® 4.8N/AN/ASYNERGY® / STATIC 8N/AN/AN/ASYNERGY® / STATIC 8N/AN/ASynergy®: 15.875 - 17.875" Static: 16.75"POWER TILT 8N/AN/AN/ALIFT & TILT 8N/AN/A16.75"TRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ4 POWER TILT 17.5-19.5"17.25-19.25"N/AQ4 LIFT AND TILT 17.5-19.5"N/AN/AQ CAPTAIN SEATN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)N/A	TRU-BALANCE® 2 HD STATIC	N/A	N/A	N/A
Q4 POWER TILT W: 16-20" D: 16-22" W: 20-24" D: 20-24" N/A SEAT-TO-FLOOR HEIGHTS 13.16 TRU-BALANCE® 4 N/A N/A N/A SYNERGY® / STATIC 8 N/A N/A Synergy®: 15.875 - 17.875" Static: 16.75" POWER TILT 8 N/A N/A Synergy®: 15.875 - 17.875" Static: 16.75" POWER TILT 8 N/A N/A 16.75" LIFT & TILT 8 N/A N/A N/A TRU-BALANCE® FLEX SEAT 8 N/A N/A N/A Q4 POWER TILT 17.5-19.5" 17.25-19.25" N/A Q4 LIFT AND TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A N/A SPP: 16.5-18.5" (Flex) N/A	TRU-BALANCE [®] 2 HD POWER TILT	N/A	N/A	N/A
Q4 POWER TILT W: 16-20" D: 16-22" W: 20-24" D: 20-24" N/A SEAT-TO-FLOOR HEIGHTS 13.16 TRU-BALANCE® 4 N/A N/A N/A SYNERGY® / STATIC 8 N/A N/A Synergy®: 15.875 - 17.875" Static: 16.75" POWER TILT 8 N/A N/A Synergy®: 15.875 - 17.875" Static: 16.75" POWER TILT 8 N/A N/A 16.75" LIFT & TILT 8 N/A N/A N/A TRU-BALANCE® FLEX SEAT 8 N/A N/A N/A Q4 POWER TILT 17.5-19.5" 17.25-19.25" N/A Q4 LIFT AND TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A N/A SPP: 16.5-18.5" (Flex) N/A	TRU-BALANCE® FLEX SEAT	N/A	N/A	N/A
SEAT-TO-FLOOR HEIGHTS 13,16 TRU-BALANCE® 4 N/A N/A N/A SYNERGY® / STATIC N/A N/A Synergy®: 15,875 - 17.875" Static: 16.75" POWER TILT N/A N/A 16.75" LIFT & TILT [®] N/A N/A N/A TRU-BALANCE® FLEX SEAT [®] N/A N/A N/A Q4 POWER TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A SSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) N/A				
SYNERGY® / STATIC 8 N/A N/A N/A Synergy®: 15.875 - 17.875" POWER TILT 8 N/A N/A 16.75" LIFT & TILT 8 N/A N/A 16.75" CAULER SEAT 8 N/A N/A N/A TRU-BALANCE® FLEX SEAT 8 N/A N/A N/A Q4 POWER TILT 17.5-19.5" 17.25-19.25" N/A Q CAPTAIN SEAT N/A SPP: 16.5-18.5" (Flex) N/A				
SYNERGY® / STATIC *Static: 16.75"POWER TILT *N/AN/ALIFT & TILT *N/AN/ATRU-BALANCE* FLEX SEAT *N/AN/AQ4 POWER TILT17.5-19.5"17.25-19.25"Q4 LIFT AND TILT17.5-19.5"N/AQ CAPTAIN SEATN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)	TRU-BALANCE [®] 4 ⁸	N/A	N/A	N/A
LIFT & TILT 8N/AN/AN/ATRU-BALANCE® FLEX SEAT 8N/AN/AN/AQ4 POWER TILT17.5-19.5"17.25-19.25"N/AQ4 LIFT AND TILT17.5-19.5"N/AN/AQ CAPTAIN SEATN/ASSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex)N/A	SYNERGY® / STATIC 8	N/A	N/A	
TRU-BALANCE® FLEX SEAT [®] N/A N/A N/A Q4 POWER TILT 17.5-19.5" 17.25-19.25" N/A Q4 LIFT AND TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A SSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) N/A	POWER TILT 8	N/A	N/A	16.75″
Q4 POWER TILT 17.5-19.5" 17.25-19.25" N/A Q4 LIFT AND TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A SSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) N/A	LIFT & TILT ⁸	N/A	N/A	N/A
Q4 LIFT AND TILT 17.5-19.5" N/A N/A Q CAPTAIN SEAT N/A SSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) N/A	TRU-BALANCE® FLEX SEAT 8	N/A	N/A	N/A
Q CAPTAIN SEAT N/A SSP: 16.5-18.5" (Flex) Captain: 20.5-22.5" (Flex) N/A	Q4 POWER TILT	17.5-19.5"	17.25-19.25"	N/A
Captain: 20.5-22.5" (Flex)	Q4 LIFT AND TILT	17.5-19.5"	N/A	N/A
OPTIONAL POWER ELEVATION N/A N/A N/A	Q CAPTAIN SEAT	N/A		N/A
	OPTIONAL POWER ELEVATION	N/A	N/A	N/A

HCPCS codes provided should not be considered as legal advice and do not guarantee reimbursement. DME providers are responsible for determining appropriate billing codes when submitting for insurance reimbursement. The information contained herein is correct at the time of publication. We reserve the right to alter specifications without prior notice.

17) 7 mph can only be achieved with optional 4-pole motors and Q-Logic 3. Maximum speed without 4-pole motors is 6.25 mph with Q-Logic 3.









4FRONT [®] 2	4FRONT [®] 2 HD	Q1450	R-TRAK
Group 3: Standard (K0848/K0849), Single Power (K0856/K0857), Multiple Power (K0861)	Group 3: Heavy Duty (K0850), Single Power HD (K0858), Multiple Power HD (K0862)	Group 3: Very HD (K0852/K0853), Single Power Very HD (K0860)	Group 3: Standard (K0848/K0849), Single Power (K0856/K0857), Multiple Power (K0861)
FSS Contract V797D-70001	FSS Contract V797D-70001	FSS Contract V797D-70001	Coming Soon to FSS Contract
300 lbs.	450 lbs.	600 lbs.	300 lbs.
Up to 6.25 mph	Up to 5 mph	Up to 4.5 mph	Up to 7 mph
(3.5 mph when elevated)	(2.7 mph when elevated)		(3.5 mph when elevated)
3.14" (battery tray)	3.14" (battery tray)	1.5" (anti-tip wheels)	3.97" (battery tray)
25.9″	25.9"	26.5"	25.7"
39.9"	39.9"	38.25"	34.8"
24"	24"	29.25"	24.2"
14" Solid Optional: 14" Pneumatic; 14" Knobby	14" Solid Optional: 14" Pneumatic; 14" Knobby	14" Solid	14" Solid Optional: 14" Pneumatic
Rear: 9" Flat Free	Rear: 9" Flat Free	Rear: 9" Solid	Front: 9" Solid
Front: 4" Flat Free	Front: 4" Flat Free	Front: 4" Solid	Rear: 4" Flat Free
130 lbs.	130 lbs.	195 lbs.	128 lbs.
Group 24: 51.5 lbs. each Group 34: 44.8 lbs. each	Group 24: 51.5 lbs. each	52 lbs. each	51.5 lbs. each
Front-wheel Drive	Front-wheel Drive	Front-wheel Drive	Rear-wheel Drive
4-pole	4-pole	4-pole	4-pole
Group 24 (2)	Group 24 (2)	Group 24 (2)	Group 24 (2)
8A Off-board	8A Off-board	8A Off-board	8A Off-board
120A Q-Logic 3	120A Q-Logic 3	120A Q-Logic 3	120A Q-Logic 3
		90A VR2 6-key	75A Q-Logic NE+
W: 16-22" D: 14-22"	N/A	N/A	N/A
N/A	N/A	W: 20-32" D: 20-28"	N/A
W: 12-22" D: 12-22"	N/A	N/A	W: 12-22" D: 12-22"
W: 12-22" D: 12-22"	N/A	N/A	W: 12-22" D: 12-22"
W: 12-22" D: 12-22"	N/A	N/A	W: 12-22" D: 12-22"
N/A	W: 20-24" D: 20-24"	N/A	N/A
N/A	W: 20-24" D: 20-24"	N/A	N/A
N/A	W: 20-24" D: 20-24"	N/A	N/A
N/A	N/A	W: 20-32" D: 20-28"	N/A
N/A	N/A	W: 20-32" D: 20-28"	N/A
W: 15-22″ D: 15-20″	N/A	N/A	W: 15-22″ D: 15-20″
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
17.75 - 18.75" (Synergy® N/A)	17.75 - 18.75" (Synergy® N/A)	16.5-18.5"	16-18" (Static only)
17.75-19.75"	17.75-19.75"	19.5-20.5"	18.5-19.5"
17.75-19.75"	17.75-19.75"	N/A	17.25-18.25"
16.5-18.5"	16.5-18.5"	N/A	16.5-17.5"
N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A
SSP: 17.5-22.5" (Flex); 17.75-19.75" (Lift) Captain: 21.75-22.75" (Flex); 21.75-23.75" (Lift)	N/A	SSP: 18.5-20.5" (Static TB3) Captain: 22.5-24.5" (Static TB3)	SSP: 15.5-17.5" (Flex); 17.25-18.25" (Lift) Captain: 19.5-21.5" (Flex); 21.25-22.25" (Lift)
10" Safe Seat Elevation at 3.5 mph	10" Safe Seat Elevation at 2.5 mph	N/A	10" Safe Seat Elevation at 3.5 mph





#1 FOR REHAB POWER

Quantum[®] Power Chairs are FDA Class II Medical Devices designed to aid individuals with mobility impairments.