

THE EXCITING NEW R-TRAK

REAR-WHEEL DRIVE POWER CHAIR

R-TRAK

shown in *Evolution Orange* with
TRU-Balance® 3 power positioning,
Q-Logic 3 drive controls and
Stealth® Premiere cushion.



FDA Class II Medical Device *



MEET THE FIRST HIGH-PERFORMING GROUP 3 REAR-WHEEL DRIVE POWER CHAIR IN OVER 10 YEARS!

The R-TRAK revolutionizes the rear-wheel drive power chair experience. Independent SRS suspension on all four wheels combined with a compact base provide a smoother, more maneuverable driving experience. Standard features include fender lights, USB charger and drive wheel color accents. The R-TRAK is also available with our 10" safe seat elevation, allowing the client to drive up to 3.5 mph while elevated.



QUANTUM®

#1 FOR REHAB POWER



| quantumrehab.com

Specifications

DRIVE WHEELS	Standard: 14" pneumatic Optional: 14" flat free 14" knobby
CASTER WHEELS	Front: 9" flat free
ANTI-TIP WHEELS	Rear: 4" solid
MAXIMUM SPEED ¹	Up to 7 mph (3.5 mph when elevated)
GROUND CLEARANCE	3.97" (battery tray)
TURNING RADIUS ²	25.7"
OVERALL LENGTH ²	34.8"
BASE WIDTH	24.2"
SEATING SIZES	
TRU-Balance® 3 Static Seat	Width: 12-22" Depth: 12-22"
TRU-Balance® 3 Power Tilt	Width: 12-22" Depth: 12-22"
TRU-Balance® 3 Power Lift & Tilt	Width: 12-22" Depth: 12-22"
TRU-Balance® Flex Seating	Width: 15-22" Depth: 15-20"
SEAT-TO-FLOOR HEIGHTS	
TRU-Balance® 3 Static Seat ⁵	16-18" (not available with Synergy®)
TRU-Balance® 3 Power Tilt ⁵	18.5-19.5"
TRU-Balance® 3 Power Lift & Tilt ⁵	17.25-18.25"
TRU-Balance® Flex Seating	16.5-17.5"
TRU-Balance® Flex Tilt	16.25"
BATTERY SIZE ³	Group 24 (2)
BATTERY WEIGHT ⁷	Group 24: 51.5 lbs. each
AVAILABLE ELECTRONICS	120A Q-Logic 3 75A Q-Logic NE+ 75A Q-Logic NES
BATTERY CHARGER	8A Off-board
MOTOR PACKAGES	4-pole motors
WEIGHT CAPACITY ⁴	300 lbs.
BASE WEIGHT	128 lbs.
MEDICARE CODE COVERAGE	Group 3: Standard: (K0848/K0849) Single Power: (K0856/K0857) Multiple Power: (K0861)

* FDA Class II Medical Devices are designed to aid individuals with mobility impairments.

- Speed varies with user weight, terrain type, battery charge, battery condition and tire pressure.
- Without front riggings
- Battery capacity may change when adding power positioning systems.
- Weight capacity is dictated by the selection of seating.
- All measurements +/- 1/8" with 18" x 18" seat, fixed towers, 300 lbs. weight capacity and solid tires (add 3/8" with pneumatic tires). Widths may increase seat-to-floor height. Contact Customer Service for details. Listed measurements are in the lowest position; does not include elevating system unless specified.
- Battery weight may vary +/- 3 lbs. based on manufacturer.
- All Quantum Rehab® units can be ordered with specialty controls.
- Call for availability
- Seat-to-floor heights are measured with the unit unloaded. Due to the 4Front 2's suspension system, seat-to-floor heights are approximately 0.25" lower when the unit is loaded.


Standard Features

- 4-pole motors
- Maximum speed of up to 7 mph (3.5 mph when elevated)
- LED lighting in front caster arms and fenders
- Superior, automotive-grade SRS (Smooth Ride Suspension)
- Unmatched driving performance and ride quality
- Advanced stability for smooth obstacle transitions

Options

- 10" of power adjustable safe seat elevation at speeds of up to 3.5 mph
- Quantum® backup camera
- Depth-adjustable vent tray ⁸
- Compact vent tray ⁸

Colors

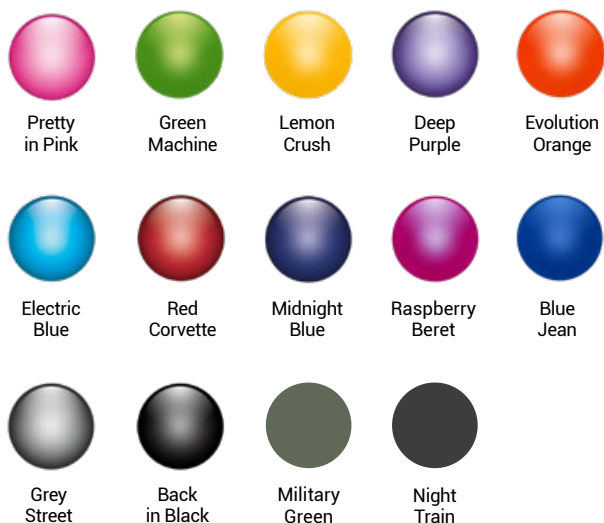

QUANTUM®

#1 FOR REHAB POWER

(US) 866-800-2002

(Canada) 888-570-1113

quantumrehab.com

